

## A Novel Detection of Bleeding Frame and Region in the Wireless Capsule Endoscopy Video

S. Renuka<sup>1\*</sup>, A. Annadhasan<sup>2</sup>

<sup>1</sup>Dept. of Computer Science, St.John's College of Arts & Science, Ammandivilai, K.K. Dist, TamilNadu. (Affiliated to Manonmaniam Sundaranar, University, Tirunelveli, TamilNadu), India

<sup>2</sup>Dept. of Computer Science, St. Govt. Arts and Science College, Kadaladi, Ramanathapuram, Dist, TamilNadu, (Affiliated to Alagappa University, Karaikudi, TamilNadu), India

Corresponding Author: [renukaazhagu@gmail.com](mailto:renukaazhagu@gmail.com)

Available online at: [www.ijcseonline.org](http://www.ijcseonline.org)

**Abstract**—Endoscopy process to find the bleeding parts in human body is a complicated work. In ancient mechanism they formally use the wired endoscopy to the patients it will leads to several drawbacks. Thus nowadays wired is changed with wireless capsule endoscopy to overcome the situational hazard of the physician. This is further enhanced by the wireless capsule endoscopy through which it can be used. Wireless Capsule Endoscopy (WCE) is in the form of capsule like format that is used for the further identification by the physician. Here the WCE capture videos of the inner organs. While the physician used to point out the issue, they want to focus on the particular video. There may be manual errors may occur. Thus it can be overcome by the proposed word based color histogram. This model is a promising model to compute the WCE video and predict the accurate result without the burden of the phycisian. It is proposed in this system by including a color features. In this model the RGB color feature is used to predict the bleeding frame. To classify the bleeding Frame two classification algorithms is used. They are Support Vector Machine (SVM) and K Nearest Neighbour (KNN) is proposed in this project. Bleeding frame is identification is maintained and performed with the help of proposed algorithm and techniques are simple and efficient.

**Keywords**—WCE, Word based color Histogram, SVM, KNN

### I. INTRODUCTION

Wireless capsule Endoscopy is an upcoming technique in the medical field. The technique that used to support in medical field is lacking in security and performance. The security is mentioned here as human protection. The device that is used to capture is simple and efficient. Performance is based on the accurate result provide by the devices. This is still far behind the idea. The main drawback of the system is manual prediction. Here the camera is embedding in the format of capsule. This should be used to capture the video when it is inhale by the patients. It will capture the video from the food vessel till to the mucosa region of the stomach area. WCE capture the videos in the form of the simple and reliable format through which it should be used to maintain under the reliable format through which it can be maintained under the simple and various format of the usage. The wireless endoscopy is an excellent tool to identify the bleeding region in a Mucosa Region. The captured video is run by the doctors to find the particular area to find the bleeding frame. But the drawback is when they continuously review the video they can make manual errors. Thus the prediction of the particular

frame is inefficient. It can be overcome by the various methodologies. The wireless capsule endoscopy figure is shown below

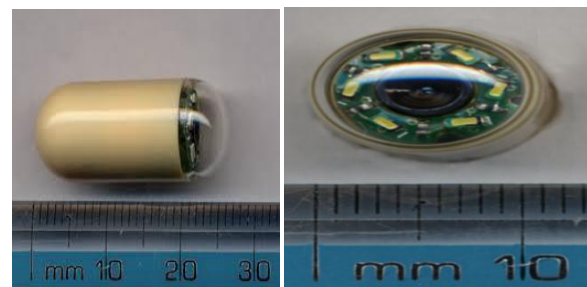


Figure 1. Wireless Capsule Endoscopy

In Fig 1: Wireless Capsule Endoscopy is shown inside the capsule a fine-grained camera is built inside the capsule. Thus this device is simple and never harm to the patients inner organs. The wireless Capsule Endoscopy is used to mainly detect the Gastro intestinal form to find the ulcer affected area. The camera is used to record the video from the patient intestine at each angle. Further it should be taken out and then

processed with the help of the computer to run the video and to find the bleeding area. This should not be considering as the accurate result formation because of the less consideration or eye contact the physician. To overcome the drawback the computation formulation is needed to propose. Thus several techniques are research in the earlier reviews. Here the main usage of the system should be helped to overcome the earlier drawbacks of the system. Here the proposed model is used to overcome all the hurdles.

Here the lots of reviews are maintained to forward the simple and efficient process to find the rapid bleeding detection process. In the wireless capsule endoscopy there are lots of minorities issues that should be consider for the future reviews. One of the models is used to gather the pixels of the video frame and then they used for the further prediction area. For grouping the pixel in the image they used super pixel formulation to group them. Most of the previous issues used segmentation formulation and then they propose the classification process. This should not be formulated as the simple process. Thus a simple and efficient process is implemented in the proposed mechanism by using word based color Histogram.

## II. RELATED WORK

To find the bleeding area detection in the WCE images various popular ideas are proposed by the physician. They are context aware saliency detection [1] the process of this model is focus on the dominant object through which it should be used. Thus it focuses on the particular part time delay is highly occurring in this model. This can be overcome by the next newly derived mechanism that is Computer aided bleeding mechanism in WCE video. This model consists of the compute based vision to support the system to find the rapid bleeding area is proposed in the work [2]. This can be used to maintain under the simple and efficient process. Thus the drawback that occurs in the above model is latency issues. Here latency issues are termed as slow processing or slow computation. The next paper is based on the segmentation model through which the data are segmented using the particular segment transformation. Through this model the result is occur in the form of statistical order. So it is not obtain to overcome the issue. Then the upcoming model is based on the previous work used with the help of color features. The features depend on the CMYK model. Thus it should be maintain under promising and useful model for the entire mechanism through which it should be occur. During this process manual errors occur and it is not based on the error free model [6]. Another model to overcome the before issues are linear coding based classification. Thus the classification algorithm is used here to implement a simple parameter for processing. But the classification algorithms used in this model require more complexity. Thus it should be overcome for the further issues.

In [5], the proposed framework, the watermark message is first embedded in the black plane by modulating in frequency domain. In this paper, an algorithm based on Cox method for a color adjustment step is then followed to modify the CMY planes in order to minimize visibility of the watermark. One advantage of the proposed framework is that it can conceptually reach “zero” visual noise.

Even if taking color mismatching and inaccurate printer characterization into account, the perceptible watermarking noise is still much lower than many traditional methods. Thus, it allows significant increase in watermarking energy without sacrificing image quality. Another advantage is that it can easily enable “blind decoding”. More specifically, the original image is not necessarily required in decoding phase

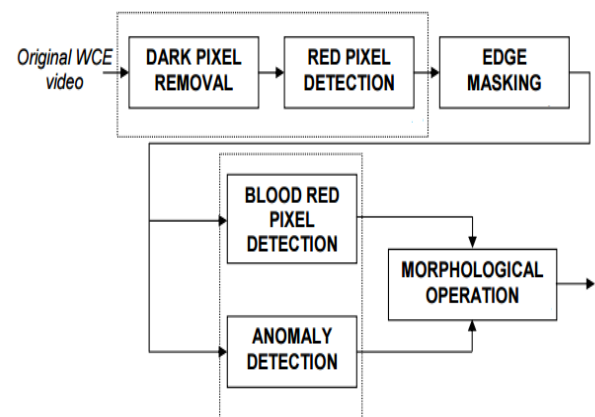


Figure 2. Existing Block Diagram

### Disadvantages:

- In existing system there is no clear prediction of bleeding area
- Require large number of time.
- Not supported for uncompressed data
- Does not provide valid information

## III. PROBLEM STATEMENT

The problem statement that identified in the previous mechanism is simple and should be used to maintain under the several methodology through which it can be used. Color segmentation is used as the drawback that used in the previous methodology. It should be research and form under the various mechanism through which it can be used for the further reviews. The main acknowledgement of the previous mechanism is simple but not consider as the efficient process. The previous color based scheme and the proposed model is not still processed with the help of the entire process mechanism. The computational time delay and the various issues is used to maintain and cover the area to overcome the research utilities of the concept. This can be overcome with the help of the previous model.

#### IV. PROPOSED METHOD

It should include important findings discussed briefly. Wherever necessary, elaborate on the tables and figures without repeating their contents. Interpret the findings in view of the results obtained in this and in past studies on this topic. State the conclusions in a few sentences at the end of the paper. However, valid colored photographs can also be published.

The Proposed model is based on the simple and efficient process to overcome the previous drawback. The model is based on the extraction process. It commonly uses color spaces such as RGB, HSV and LAB. Here the color space RGM is used. Choose any reference color space then extract suitable color feature to describe the bleeding frame. WCE may not include Blue, Violet. It concentrated in small region of the color space.

To overcome this new color feature is used to characterize the WCE images. The proposed color feature extraction method is used to obtain the specific color range of the WCE images. Randomly select 10% bleeding images and 10 % normal images from the training data set. Then calculate the corresponding cluster centers independently by inputting the pixel represented using image vectors in the color space to the K- means clustering procedure.

Bleeding in the gastrointestinal (GI) tract result from a number of etiologies, vascular tumors, ulcers and inflammatory lesions the general approach to diagnose the bleedings is to directly view the GI tract by different manners. The existing methods detect the bleeding frames from the normal ones in some degree. Majority of them extract the complete color features from a WCE image, ignoring the specific color range of WCE images

The proposed model designed with word based color histogram for bleeding detection in WCE images. It will find the most of the color information of the bleeding images. It calculates the color words by applying K-means clustering in WCE images in the specific color space. Then each WCE image is characterized as histogram of the cluster centers to represent the feature vector. Finally, SVM and K nearest neighbor are utilized as classifiers to detect bleeding frames. Secondly localization of the bleeding areas in the bleeding frames is focused. Inspect the bleeding images under different color spaces like RGB, HSI/HSV, CMYK, CIELAB, YUV, and XYZ and select the components that highlight the bleeding areas. Then create the first stage saliency map by combing these components together to strengthen the suspicious regions. Then combine all the saliency features of finding the color area. And predict the reddest situated area and fix that region.

The k-means clustering utilizes the color information of the WCE frame and reduces the dimension of the color features. The concentrated cluster centers from the bleeding data set. Then there dimensional color data map of each point in a WCE image the nearest visual words and calculate the number of each visual word. It produces a histogram value (w, d) where they denote ith visual word in the k-size color clusters. Using this method the WCE images are characterize as the word based histogram. The proposed color features are based on the histogram thus it preserves the robustness to the rotation and translation of the image contents. The word based color histograms makes the best of the range of the color information in the WCE images and represent the color distribution.

*Advantages:*

- Easy detectable
- Clear prediction of bleeding area in the frame
- The main use of this project is used to save the time for detecting the bleeding area.

#### ARCHITECTURE

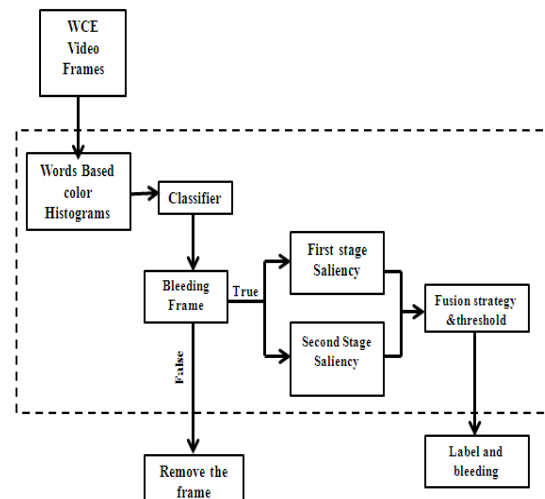


Figure 3. Proposed Block Diagram

#### V. IMPLEMENTATION

The Bleeding Frame detection is proposed in this model. Here Bleeding frame detection problem are analyzed and overcome by the proposed method model. This should be overcome with the help of simple and efficient process. The implementation of the propose model is represent in this chapter

In Extraction of bleeding frame is proposed by implementing the classification algorithm. Here two classification algorithm is used one is SVM (Support Vector Machines) and another one is KNN (K Nearest Neighbor identification). This can be used to follow the main reference of the system through

which it is simply classified and overcome by the proposed model. The main use of the project is used to find the best classification model to extract the bleeding frame. The more accurate result is finding out by training 10% of normal image with 10% of affected image. Thus the classification algorithm is trained to analyze the minute difference between the normal one and the affected region of the image. the most useful prediction of the image is used to maintain under the simple and efficient access of the image through which it should be extend and protective.

After the successful completion of the proposed extraction the next process is the RGB histogram of the proposed model is used to find Bleeding detection of the model. The RGB color model is given in the below diagram Fig 4.

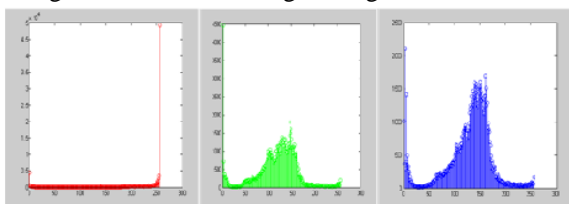


Figure 4. RGB color Histogram

If the red value peak signal is high means the Bleeding is present in the current frame. If green and blue value is higher than the Red value means the current frame is normal without bleeding.

The main concept of the RGB color histogram is used to maintain a simple and efficient process of the work to be maintained in the system. The current value is highly calculated using the word based color histogram. This is the proposed model technique through which it should be used to identify the bleeding detection model is used. The current identification model is used to overcome the burden of the identification system.

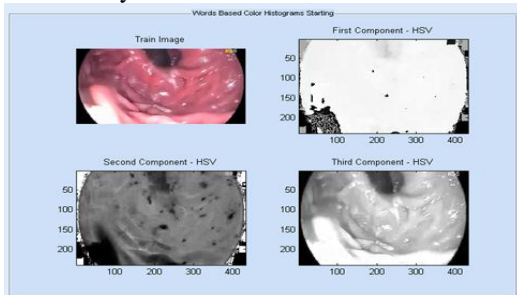


Figure 5. Bleeding Classification

The next process is purely designed to identify the bleeding area. Through which it should be used to find the bleeding classification after denoting the RGB value using Color histogram model. The next process is used to identify the bleeding frame. Thus it is identified by the proposed novel model. And the detection frame is stored in the separate

folder. Thus it is simple and efficient process for storing the result.

## VI. RESULT DISCUSSION

The existing model is based on the simple and efficient work through which it should be analyzed with the help of previous methodology to the normal ones. This can be used for further classification of the model and it should be used to maintain under simple classification through which it should be retrieved. This should be efficient for the simple model that can be used to process for the entire process thus it is an efficient process for finding the best methodology of the process to be under different processing mechanism. The data that is used here to compare the various process of the mechanism this should be easily process by the entire mechanism. The main use of this mechanism is still be used to process for the comparison of the entire mechanism.

The basic need of the mechanism is use to process by comparing the successive ratio of the detection of the bleeding frame and the localization of the model. This should be efficiently detectable by the performance and the evaluation The main use of this process is used to maintain under the main use of the proposed model. This should be used to formulate best performance of the area.

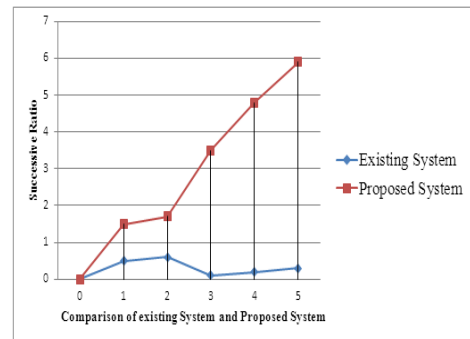


Figure 6. Graphical comparison between existing and proposed model.

Another comparison of the proposed model is used to include the technical comparison between the existing and the proposed. The proposed techniques such as word based color Histogram detection and Pyramid of Hue Histogram.

Accuracy	Successive Ratio	
	Pyramid of Hue Histogram	Word Based Color Histogram
10	1	5
30	2	25
60	5	55
<b>Average</b>	2.66	28.33
<b>Percentage</b>	8%	85%

TABLE 1. AVERAGE DETECTION OF PROPOSED TECHNIQUES

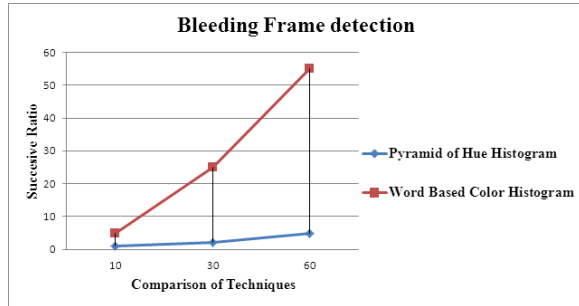


Figure 7. Comparison between technique

The Graph clearly shows the successive ratio of the proposed Back of words mechanism. The Existing segmentation model is a time consuming work and the proposed bag of words based color histogram is an efficient one. It is more useful and error free technique. Adopted and succeeded in the medical field to reduce the work of the physician.

## VII. CONCLUSION

Finally the result concludes that by comparing various mechanisms in the previous issues it is simple and efficient and followed by the proposed methodology. Without any complexities the patients result is predict as accurate with the proposed mechanism. The classifiers that are used to maintained the model with simple and efficient. The mechanism can be used to reduce the burden of the physician. Thus it can be provided to find the bleeding area without any complexities. Thus this is the promising solution to overcome the issue. This should be used for the correct prediction mechanism for the proposed methodology. The main usage of the above mechanism is used to maintain the accuracy of the system. This should be used to overcome the drawbacks of the previous issues. Here the color feature that used in the above model is the RGB feature which is simple and efficient. In future a method is implemented to detect bleeding regions from WCE video. To find bleeding regions super pixel segmentation and adaptive neuro fuzzy inference system were used. Initially the video will be read. And it is converted into frames in that frames we are finding the edges using canny detector. Then we remove the edge by means of morphological dilation. After removing the edges, group the pixel based on color and location using super pixel segmentation. Image segmentation is the process of dividing an image into multiple parts that's used to identify relevant information in digital images. Finally classifier is used to find the bleeding and non-bleeding frames.

## REFERENCES

- [1] D. O. Faigel and D. R. Cave, Capsule endoscopy: Saunders Elsevier, 2008.
- [2] M. Yu, "M2a (tm) capsule endoscopy: A breakthrough diagnostic tool for small intestine imaging," *Gastroenterology Nursing*, vol. 25, pp. 24-27, 2002.
- [3] G. Gay, M. Delvaux, and J.-F. Rey, "The role of video capsule endoscopy in the diagnosis of digestive diseases: a review of current possibilities," *Endoscopy*, vol. 36, pp. 913-920, 2004.
- [4] G. Iddan, G. Meron, A. Glukhovsky, and P. Swain, "Wireless capsule endoscopy," *Nature*, vol. 405, p. 417, 2000.
- [5] N. M. Lee and G. M. Eisen, "10 years of capsule endoscopy: an update," 2010.
- [6] M. Pennazio, "Capsule endoscopy: Where are we after 6 years of clinical use?," *Digestive and Liver Disease*, vol. 38, pp. 867-878, 2006.
- [7] B. Li and M.-H. Meng, "Computer-aided detection of bleeding regions for capsule endoscopy images," *Biomedical Engineering, IEEE Transactions on*, vol. 56, pp. 1032-1039, 2009.
- [8] R. Francis, "Sensitivity and specificity of the red blood identification (RBIS) in video capsule endoscopy," in *The 3rd International Conference on Capsule Endoscopy*, 2004.
- [9] Y. Fu, W. Zhang, M. Mandal, and M.-H. Meng, "Computer-Aided Bleeding Detection in WCE Video," *Biomedical and Health Informatics, IEEE Journal of*, vol. 18, pp. 636-642, 2014.
- [10] L. Cui, C. Hu, Y. Zou, and M.-H. Meng, "Bleeding detection in wireless capsule endoscopy images by support vector classifier," in *Information and Automation (ICIA), 2010 IEEE International Conference on*, 2010, pp. 1746-1751.