

Implementing and Evaluating the Performance Metrics using Energy Consumption Protocols in MANETs using Multi-Path Routing- Fitness Function

Mounika P^{1*}, Prasanna Kumar M²

^{1,2}Department of CSE, East West Institute of Technology, Bangalore, India

DOI: <https://doi.org/10.26438/ijcse/v7si15.367372> | Available online at: www.ijcseonline.org

Abstract— The energy consumption plays a key role in Mobile Adhoc Network in a day to day life. Mobile Ad Hoc Network (MANET) structure is a temporary network organized dynamically with a possible set of wireless mobile nodes without depending on extra any infrastructural facilities and central administration requirements additionally based on the solutions to overcome the minimal energy consumption issues. Nodes are battery operated temporarily does not operated on permanent batteries, so energy consumed by a battery depends on the lifetime of the battery and its energy utilization dynamically decreases as the nodes change their position in MANETs. Multi-path routing algorithm in MANETs provides a best optimal; solution to transmit the information in multiple paths to minimize the end to end delay, reduce energy consumption and also increases life time of the network. The research mainly focused on minimum energy consumption techniques in MANET is of a great challenge in industries. In this paper, the author highlights a novel approach Adhoc on Demand Multipath Distance Vector (AOMDV) routing protocol to minimize energy consumption algorithm in MANET by incorporating the demand multipath distance and fitness function. The Adhoc on Demand Multipath Distance Vector-Fitness Function (AOMDV-FF) routing protocol short out the path that consumes minimum energy and the simulation performance is evaluated using network simulator 2 (NS2)tool. Two protocols are proposed in this work AOMDV and AOMDV-FF and compared their performance parameters such as energy consumption, throughput, packet delivery ratio, end to end delay, network life time and routing overhead in terms of speed, packet size and simulation time. The overall simulation results of the proposed AOMDV-FF method is considered a network with 49 nodes and the network performance factor-end to end delay 14.4358×10^{-3} sec, energy consumption 18.3673 joules, packet delivery ratio 0.9911 and routing overhead ratio 4.68 are evaluated the results show an improvement as compared to other methods AOMDV and AOMR-LM

Keywords— Energy Efficient, MANET, Multipath Routing, Fitness Function. Packet Delivery Ratio, Throughput.

I. INTRODUCTION

As the scaling down technology is progressing tremendously in a day to day life, in turn the growth of the computer performance as well as the scope and applications of wireless technologies is also drastically increasing. With advent of new technologies, the research has been mainly focused on minimum power consumption protocol developments and its cost effective hardware architecture implementation. The awareness of power consumption, investigation on performance, effective routing protocols and more efficient path selection algorithms are major concern to improve the performance of the metrics and also to acquire maximum energy efficiency in MANETs. The performance factors of MANET nodes are having limitations in terms of speed and power, battery, storage, and transport mechanisms. Most critical and challenging issues in MANETs are development of routing techniques and also development of routing algorithms. Multipath routing protocols most reasonably and efficiently find shortest path among the many identified paths to establish

the link to transmit the packets information source nodes to destination nodes. It is not necessary that each time the source will relay on only shortest path available to improve the life time of the network performance but also other factors like: power, battery life may also influence the performance of the networks. So the saving the power consumed at the source is limited by the number of dependant mobile nodes, the researchers made attempts to provide the minimal power consumption at these nodes which in turn enhances the lifetime of MANETS. There are several critical issues and facts exist in multipath routing protocols developing techniques. The researches focused on novel methodologies and algorithmic approaches that could able to identify the shortest path between the source nodes and the destination nodes. As the number of nodes increases this identity issue becomes much more complicated in MANETs to transfer the data/information in the form of packets. In most of the cases, partial amount of energy is being spent on identifying the optimum path and this being one of the drawback or critical issue is trying either to minimize or eliminate during transmission of data.

So the part of energy being wasted during identifying the shortest path is given major priority to resolve of this paper. The more energy is being wasted during the data transmission. In this paper, the author identifies the approach to incorporate some of these major issues and to develop an innovative idea Adhoc on Demand Multipath Distance Vector (AOMDV) routing protocol to minimize energy consumption algorithm in MANET with add on functions the demand multipath distance and fitness function too. Adhoc on Demand Multipath Distance Vector Fitness Function (AOMDV-FF) an efficient multipath routing protocol is able to detect the possibility of conceiving nominal power with minimum path distance. The AOMDV-FF uses the fitness function to obtain an optimization solution by considering six parameters to choose the best possible shortest route with minimum energy level of the route and increasing the network lifetime of the path to transfer the data from the source to the destination more efficiently. From the obtained simulation results as an overall performance, AOMDV-FF routing protocol shows the better performance factors in terms of throughput, packet delivery ratio, end-to-end delay, energy consumption, network lifetime and routing overhead ratio as compared to both AOMDV and Ad-Hoc On Demand Multipath Routing with Life Maximization (AOMR-LM) routing protocols.

The work of this paper is structured as follows: Section 2 elaborates the related literature survey of AOMDV with fitness function as major concern and critical issues involved in the current work; Section 3 explore with a novel AOMDV-FF method; Section 4 highlights some of key factors based on the obtained results and evaluation process adopted; Section 5 performs the conclusion based on the obtained results and explores insights to further enhance as a future scope

II. LITERATURE SURVEY

The literature survey explores the new developments and their tremendous utilization methods of internet protocols (IPs) in mobile Adhoc networks and wireless communications applications mainly depend on their band width limitations.

Aqeel Taha [1] and S Carson [11] proposed that the networks that utilized in MANETs mainly depend on routing protocols and topologies like; multi-hop, dynamic and random types. Recent developments in many routing protocols have been made efforts by researchers to enhance the lifetime of all routes and in turn made to select the best path to increase the network lifetime. J. Iswarya [2] and Mueen Uddin [3] both proposed similar multipath routing protocols provide best solutions to select the shortest path to transfer information (data) packets efficiently between the source nodes and destination nodes. The same is

preserved and used as a backup data whenever the route failures occurs and also to provides the better performance without degrading the performance factors.

Due to lack of non-availability of permanent power supplies in mobile energy consumption plays a vital role in the research area as how to minimize power consumption during the transmission of data in MANETs. Ramya. V [4] proposed a model on how to minimize energy consumption with the routing protocol AOMDV using fitness function and that establishes the shortest route to transfer the data more efficiently between the source nodes and destination nodes. With the help of the performance parameters that are used to calculate the metrics using NS₂ tool and also compared with protocols AOMDV AOMR-LM for better performance. The protocol AOMDV-FF was able to establish an optimal link among the nodes in a network and also provides less energy consumption in multipath routing.

May Cho Aye [5] highlights the major issue in mobile Adhoc networks in energy consumption and provides a solution by which this issue is minimized through more efficient multipath routing protocol that consumes less energy during the transmission of power and residual energy is used to maximize the network life time.

M. Tekaya [6] and L. Gatani [7] elaborated what are the possible ways to increase the network performance from the literature survey and explains the two types of the routing protocols implemented for ad hoc networks: Table driven (proactive) based on consistency of updated information and on-demand reactive [8, 9]. At every instant of time, these routing protocols are shown more consistent and provide updated routing information efficiently at each mobile host. These protocols explain that each host mobile maintains with one or more tables regarding the routing information of all other host mobiles in the network. However network topology changes at any instant of time, the mobile hosts transmit the relevant messages to be updated to all other nodes in the network to increase the performance efficiency in establishing the routing information.

A. Montazeri, [14] AOMDV protocol is an extension of AODV protocol in locating all possible routes or multipath solution and to identify the shortest path among the identified one between the source and destination node in a given network frame. Hiremath, P. S [15] AOMDV's ideal goal is to identify multiple routes. The implementation of AOMDV is inbuilt to overcome the critical issues like; the link failure rate and route/path discontinuities in MANETS and WSNs that degrades the performance of the network [15].

destination	destination
sequence number	sequence number
hopcount	advertised_hopcount
nexthop	route_list
expiration_timeout	{(nexthop ₁ , hopcount ₁), (nexthop ₂ , hopcount ₂), ..}
	expiration_timeout

(a) AODV

(b) AOMDV

Fig.1 Structures of Routing Table

The disadvantage of AOMDV is it requires additional requests; extra route requests (RREPs) and route errors (RERRs) in a multiple path detection process, and to maintain with additional fields; route replies (RREPs) [14].

Identification of route and its route maintenance is an integral part of the route discovery process. To establish a possible set of routes between source node and destination node, first these multi path protocols need to identify the link-disjoints, node disjoints, or non-disjoint routes [16], [17]. The link-disjoint routes does not possess a common path, these nodes are referred to be in common path. Node-disjoint routes- totally disjoint routes does not possess either common nodes or links. Non- disjoint routes possess both nodes and links that are in common [18]. AOMDV's primary idea is in discovering multiple routes during the process of route discovery. The design of AOMDV is intended to serve highly dynamic ad-hoc networks that have frequent occurrences of link failures as well as route breaks. A novel approach has been incorporated to identify the route path which is applicable in this event process from all paths to the destination end.

III. METHODOLOGY

In this paper, the author incorporates an innovative idea by using Fitness Function (FF) to increase the efficiency of energy in multipath routing protocol is known as Ad-hoc On Demand Multipath Distance Vector using the fitness function (AOMDV-FF) is of major concern. This system uses the fitness function to provide an optimized solution by highlighting one parameter out of two parameters as major concern in order to select the optimum shortest route/path; first is maximum energy absorbed at the route level and second is the route/path distance while transferring the data from source to the destination more efficiently with minimal energy consumption and by prolonging the network lifetime. To improve the performance of MAC layers by adopting some of the parameters like; average energy consumption and network lifetime and also maximum level of elimination of congestion by adopting variable contention window sizes.

This work focus on energy consumption in MANET's by applying the fitness function technique to optimize the energy consumption in ad hoc on demand multipath distance vector (AOMDV) routing protocol. The modified

protocol AOMDV is with the fitness function as major concern is AOMDV-FF. The main purpose of fitness function is to identify an optimal solution among the multipath routing between source and destination nodes with minimum energy consumption. The performance of the proposed FF-AOMDV protocol has been evaluated by using network simulator version 2, where the performance comparison is made with AOMDV and ad hoc on demand multipath routing with life maximization (AOMR-LM) protocols. The comparison was evaluated based on energy consumption, throughput, packet delivery ratio, end-to-end delay, network lifetime and routing overhead ratio performance metrics, varying the node speed, packet size, and simulation time.

A fitness function is mainly an objective function to measure the metrics of a design with optimal solution in selecting a path among many paths. Fitness functions are incorporated in genetic programming and genetic algorithms to provide a suitable optimal solution for a particular design in MANET's. In particular, in the fields of genetic programming and genetic algorithms, each design solution is commonly represented as a string of numbers (referred to as a chromosome). In recursive testing operations using NS2 tool, fitness function provides a best possible round of testing among number of worst design simulated solutions. Each solution/ round it provides closest proximity that meets the required minimal solution with the help of fitness function. The fitness functions mainly classified into two based on:

- i. stationary fitness function is a set of possible test solutions.
- ii. Mutable fitness function based on niche differentiation with a set of test solutions.

In MANET's, the research mainly focus on the fitness factor depending on the factors energy, distance, delay, bandwidth, etc. This overall performance factors have shown an opportunity to design a novel routing protocol to enrich that network performance and it resources. From the literature survey, an integral part of fitness function is incorporated in particles warm optimization (PSO) algorithms [13]. It was used to find an optimized solution for the path/route if the primary path fails/route. Some of the factors that affect to select the best possible optimized route depend on:

- Utilization of energy functional properties at each node.
- The path distance identity function of all links onnectivity of all adjacent nodes.
- Evaluation of energy efficiency at each node.
- Measure path delays between the adjacent nodes.

Here the author proposed a novel method by bringing the

modifications required in AOMDV routing protocol and incorporating fitness function as major concerned. The message packets are able

From the obtained simulation results for the parametric of MANET using NS2 tool. The comparison is made for the shortest route and optimized, maximum energy efficiency. The alternative route will be calculated according to its distance. The AOMDV maintains the route with the least hop count. The modified AOMDV-FF implements the same principles of AOMDV for selecting the route with highest energy level, minimum energy consumption during transmitting and shortest possible route. The evaluation of shortest route of AOMDV-FF technique is evaluated by equation (2):

$$\frac{\sum (e) (r)}{\sum (e)}$$

- Each node complete information.
- The distances between the nodes.
- All possible energy consumptions of all the paths.

At each source node the above two parameters are calculated by permitting highest energy levels at source end and at receiving end the energy consumption is measured by route discovery recursive process. The advantage of route discovery process is used when all the routes at the destination end are failed. In such case the source node will not select an alternate approach from the existing routing table by satisfying all parameters. Thus the optimal shortest route with minimum energy consumption is identified by equation (1).

Where, 'e' represents the edges/links in the optimum route 'r'.
E = all the edges/links in the network.

A. Algorithm Implementation:

The algorithmic code for the fitness function is generated as follows:

- Choose the Source node and the Destination node.

$$\sum (e) (r)$$

4 Energy Consumption: The total amount of energy (Joules) consumed by nodes in a network within the simulation time

$$\text{Energy Consumption} = \sum (e) - (r) \quad (6)$$

- Set the parameters for the source node.
- Initialize the path request and Broadcasting the data packets and updating the routing table.
- Update all possible routes information in terms of energy levels and keep sending updated information to the routing table
- Check the best possible route by route discovery process to evaluate the metrics.

B. Performance metrics

The following performance metrics of AODMV-FF is as follows:

1 Packet Delivery Ratio (PDR): It is measurement of delivered data packets to destination against to the data packets that were

$$\frac{\sum (r)}{\sum (e)} \quad (1)$$

v = No of nodes in the optimum route 'r'
generated by the source [1].

$$\text{PDR} = \frac{\sum (r)}{\text{Maximum No of nodes in a given network}} * 100 \quad (3)$$

2 Throughput: The data size (bits) received by destination node successfully and is represented in kilobits per secs.

$$\text{Throughput} = \dots * 1000 \quad (4)$$

5. Network Lifetime: The total time (msec) required for diminishing the battery life of n

3 End to End Delay: The average time (m sec) hold by data packets during the transmission from source to destination in a network [1].

nodes and is calculated by equation (7) Network lifetime =

$$\sum (e) - (r) \quad (7)$$

(5)

6. Routing Overhead Ratio: It is a ratio factor defined as no. of routing packets divided by the overall number of data packets that were delivered.

$$(8)$$

IV. RESULTS AND DISCUSSION

In this paper, the author is implemented a novel approach an energy efficient multipath routing protocol ad hoc on demand multipath distance vector using fitness function to measure the performance metrics. Here some of the typical parameters for AOMDV-FF is considered during the simulation operation is shown in the Table 1.

Table 1 Simulation metrics of AOMDV-FF

Parameter-units	Value
No of simulation runs	5
Number of nodes	49
Node speed meters/sec	3020
Queue size	50
Simulation area- m ²	1200 x 1100
Packet size – bytes	64
Transmission range- meters	250
Initial energy value- Joules	100
Power consumption at Transmitter end- Joules	10
Power consumption at Receiving end – Joules	1.0

It provides an optimized solution to measure the important factors like highest energy level, network lifetime and shortest path, etc to transfer the data packets between the source and the destination nodes more efficiently to increase the network life time and with less energy consumption. The simulations are performed by number of iterative operations in the discovery process. The mentioned parameters are analysed for the best performance results and compared with previous existing methods from the literature survey.

The Fig 2 shows the performance of throughput metric for 45 nodes in MANET. The throughput is measured in terms of joules and the graph shows for 30 millsecs simulation time.

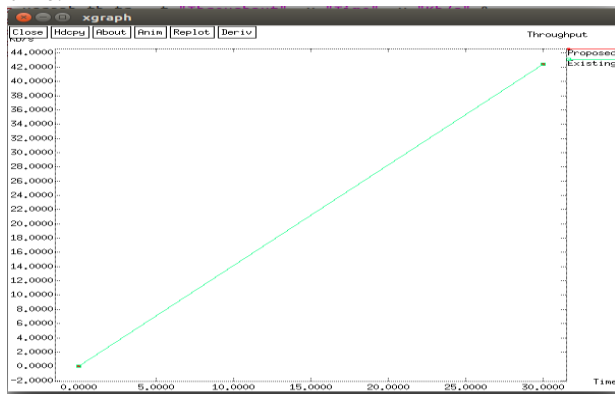


Fig 2 Throughput

The proposed method shows the throughput obtained is 4 joules as compared to existing method 5.6 joules. The comparison results show that the throughput of the proposed method is improved by 28.5%.

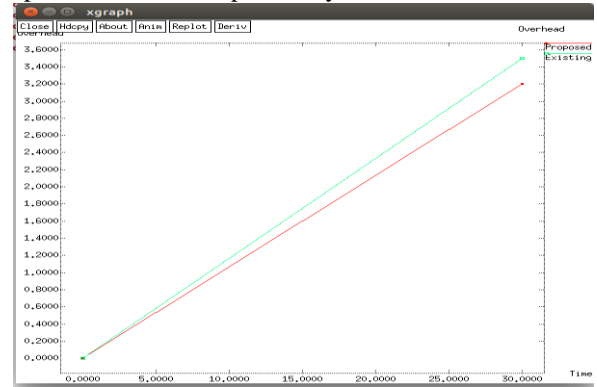


Fig 3 Overhead

The scenario of network over head ratio is mainly focus on the total number of routing packets, delivery of data packets over a single data packet. This measurement able to explore the relation between the overhead and additional bandwidth that is required in high density data traffic and the energy consumed are of main concern and an effort is made to bring the extra bandwidth to be reduced due to overhead. The routing overhead can able to minimize the band and power consumption of the nodes. The simulation results are shown in the fig 3.

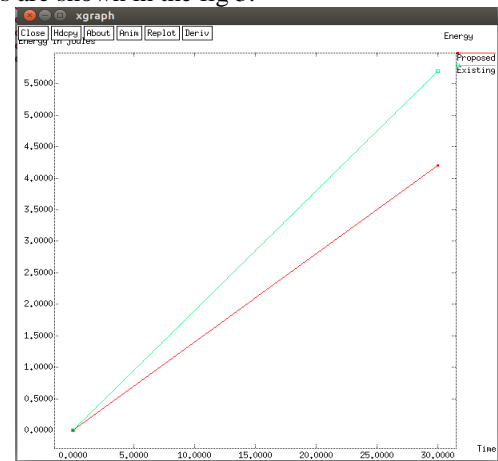


Fig 4 Energy

Fig 4 shows the simulation results of energy consumption

Fig 4 shows the simulation results of energy consumption for 30 milli seconds. The energy consumption drastically

decreased by approximately 50% as compared to existing method. The existing method consumes energy nearly 240 joules as compared to 120 joules by the proposed method. The proposed AOMVD-FF method and existing methods remains approximately stationary values from the obtained results. The PDR value is estimated for 30 milli seconds and shows a slight variation which is negligible. This is considering as one of trade off factor in this technique. The network life time is also improved by considerable amount of time.

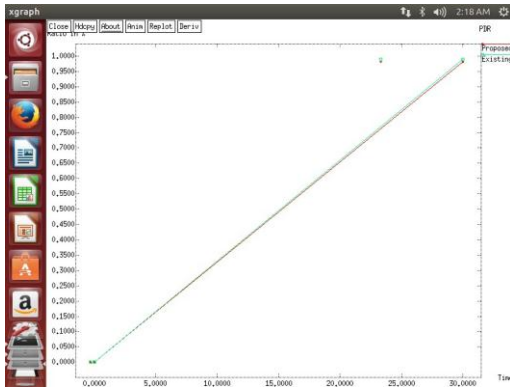


Fig 5 PDR

V. Conclusion

In this research work, the author implemented a novel approach energy efficient multipath routing algorithm using AOMDV-FF to evaluate four parameters. The estimated values run for 30 milli seconds with variable recursive operations 1,5,10. The performance factors Throughput, Overhead, Energy consumption and PDR whose performance is estimated from the obtained results using NS-2. The results show much improvement in the parameters Throughput, Overhead, Energy consumption where as PDR remains stationary. End to end delay 14.4358msec, energy consumption 18.3673joules, packet delivery ratio 0.9911 and routing overhead ratio 4.68 are evaluated.

Additional parameters are to be considered to evaluate the performance of AOMDV-FF algorithm by incorporating highest energies at source level and also increasing the capacity of the nodes along with the iterations performed to evaluate the network life time.

REFERENCES

- [1]. Aqeel Taha, Raed Alsaqour, Mueen Uddin, Mah Abdelhaq, And Tanzila Saba, *Energy Efficient Multipath Routing Protocol for Mobile Ad-Ho Network Using the Fitness Function*, June 2 2017, Vol 5, pp 10369-10381, DOI 10.110 ACCESS. 2017.2707537.
- [2]. J. Iswarya, R. Sureka, S. R. Santhalakshmi *Energy Efficiency*

- Multipath Routing Protocol For Mobile Ad-Hoc Network Using The Fitness Function*, International Journal of Innovative Research in Computer Science and Engineering (IJIRCS) www.ioirp.com ISSN: 2394-6364, Vo- 3, Issue - 3. PP 11- 15, May 2018.
- [3]. MueenUddin, AqeelTaha, RaedAlsaqour, Tanzila Saba, *Energy Efficient Multipath Routing Protocol for Mobile ad-hoc Network Using the Fitness Function*, DOI 10.1109 ACCESS.2017.2707537, IEEE Access.
- [4]. Ramya.V, Sangeetha.M, Ms. A. Rajeswari M.E-*Energy Efficient Multipath Routing Protocol foManet Using Fitness Function*, IOSR Journal o Engineering (IOSRJEN) ISSN (e): 2250-3021 ISSN (p): 2278-8719 PP 59-63.
- [5]. May Cho Aye and Aye Moe Aung, *Energy Efficient Multipath Routing For Mobile Ad Hoc Networks*, International Journal of Information Technology, Modeling and Computing Vol. 2 No.3, August 2014.
- [6]. M. Tekaya, N. Tabbane, and S. Tabbane *Multipath routing mechanism with load balancing in ad hoc network*, Int. Conf Comput. Eng. Syst (ICCES), pp 67–72 Nov 2010.
- [7]. L. Gatani, G. L. Re, and S. Gaglio, *Notice o violation of IEEE publication principles an adaptive routing protocol for ad hoc peer-to-pee network*, 6thIEEE Int. Symp. World Wireles Mobile Multimedia Netw, pp. 44–50, Jun. 2005,
- [8]. Y. Chaba, R. B. Patel, and R. Gargi, *Issues and challenges involved in multipath routing with DYMO protocol*, Int. J. Inf. Technol. Knowl Manage, vol.5, no1, pp. 21–25, Jan/Jun. 2012.
- [9]. S. Mueller, R. P. Tsang, and D. Ghosal, *Multipath routing in mobile ad hoc networks Issues and challenges* in Performance Tool and Applications to Networked Systems. Berlin Germany: Springer, pp. 209–234, 2004.
- [10]. V. Balaji, V. Duraisamy, *Varying overhead ad hoc on demand vector routing in highly mobile ad hoc network*, Jrn. Comput. Sci., vol. 7, no. 5 pp. 678–682, 2011.
- [11]. S Carson, J Macker, *Mobile Ad Hoc Networking (MANET): Routing Protocol Performance Issues and Evolution Considerations*. RFC Editor, 1999
- [12]. M Poonam, D Preeti, *Packet Forwarding using AOMDV algorithm in WSN*, Int. Jrn. Appl Innov Eng. Manage (JIAIEM), Vol 3, no. 5, pp. 456-459. May 2014.
- [13]. Y.-F. Hu, Y.-S. Ding, L.-H.Ren, K.-R.Hao, H. Han, *An endocrine cooperative particle swarm optimization algorithm for routing recovery problem of wireless sensor networks with multiple mobile sinks* Inf. Sci., vol. 300, pp. 100–113, Apr. 2015.
- [14]. Hiremath, P. S, Joshi, S. M, *Energy efficient routing protocol with adaptive fuzzy threshold energy for MANETs*, Intl Jrnal of Computer Networks and Wireless Communications (IJCNCW), ISSN: 2250-3501 Vol, 2, (2012).
- [15]. A. Montazeri, J. Poshtan, A. Yousef Koma, *The use of 'particle swarm' to optimize the control system in a PZT laminated plate*, Smart Mater. Struct., vol. 17, no. 4, p. 045027, 20