

# A Survey and Analytical Approach on Image Compression for DICOM Images

T.N. Baraskar<sup>1\*</sup>, V.R. Mankar<sup>2</sup>

<sup>1\*</sup> Department of Electronics Engineering, SGBA University, Amravati, India

<sup>2</sup> Department of Electronics Engineering, Government Polytechnic, Amravati, India

\*Corresponding Author: baraskartn@gmail.com, Tel.: +91-9922789956

Available online at: [www.ijcseonline.org](http://www.ijcseonline.org)

Received: 30/Dec/2017, Revised: 06/Jan/2018, Accepted: 22/Jan/2018, Published: 31/Jan/2018

**Abstract**— As medical imaging move towards digital imaging, medical information compression play major role in tele radiology application development. A DICOM standard work as an interface to send data from vendor independent equipment (Picture archiving and Communication System) to PDA based tele radiology system. With the help of DICOM file format, radiologist can view images in different file format. For excessing, viewing and examining patient information and images, information transmission and compression are key issues in case of such platform usage. This Paper served information of available compression techniques like Lossy and Lossless, JPEG, JPEG-LS, JPEG2000. The propose paper also analyze and compare different lossy and lossless techniques based of domain, principle and methods used. This paper contributed information related to Image Hierarchical Coding and there types like Bit Planes, Tree Structure, Laplacian Pyramid, Gaussian Pyramid. The paper also include comparison of different Wavelet family and Wavelet Transform based on various parameters.

**Keywords**— Digital Imaging and Communication in Medicine, Personal Digital Assistant, Joint Photographic Experts Group

## I. INTRODUCTION

In dealing with images it is necessary to work with both the concept of analog and digital images. An analog image is a 2D image  $F(x, y)$  which has infinite precision in intensity at each special point  $(x, y)$ . Digital image is a 2D image  $I(r, c)$  which is represent by a discrete 2D array of intensity sample. Different coordinate system used for image representation like raster oriented uses row and column, Cartesian coordinate frame [1]. Images are classify in to five following types.

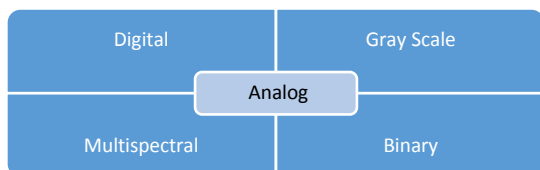


Figure1. Image Types

Any image is processing using four mode. Sequential, Progressive, Hierarchical, Lossless mode. In sequential mode image component is encoded in single left to right or top to bottom scan. In the progressive mode low quality spectral followed by high quality spectral passes. It is work on progressive spectral selection approach. In this approach all DCT coefficient are transmitted first with lower frequency

and then higher coefficient. In the hierarchical mode the image is compressed to multiple resolution level hence low resolution levels are target to the system directly without decompression of entire system [2].

The following paper is ordered as follows: Section II represents a short-lived survey of the related literature. Section III which discusses the Image Hierarchical coding methods for DICOM medical and the comparison between Image Hierarchical coding and Wavelet family are presented in Section IV. Finally, the conclusions are whole up in Section V.

## II. A SURVEY ON FILE FORMAT AND COMPRESSION METHODS USED FOR DICOM IMAGES

### A. File format used by DICOM images

Image file formats provide a standardized way to organize image data in to image file and how the pixel data understand by the software for correct loading and visualization and analysis. The major file format current useful in medical imaging is DICOM format. The DICOM format includes some information that can be useful for image registration, such as position and orientation of the image with respected to the data acquisition device and patient information with respected to voxel size. DICOM file format design consideration is based on following concept such as pixel

depth, photometric interpretation, metadata, and pixel data. The DICOM file format is created by addition of header size and pixel data [3][4]. Mathematical Equation are as follows:

$$\text{DICOM File Format} = \text{Header Size} + \text{Pixel Data Size}$$

$$\text{Pixel Data Size} = \text{Rows} * \text{Columns} * \text{Pixel Depth} * \text{Number of Frames}$$

The more popular formats used in daily practice are the JPEG, JPEG 2000, TIFF, GIF, and PNG formats. In contrast to DICOM images, images saved in these formats can be viewed on any personal computer without the need for dedicated viewers. File format are design with the help of image conversion technique and coding schemes [5]. Following are the survey of JPEG file format [6].

Table 1. Survey of JPEG file format

S. No.	File Format	Image Conversion Technique used	Coding Scheme Used	Advantages	Disadvantage
1	JPEG	DCT	Huffman	Small Size, Portable	Image Quality degraded at high compression rate
2	JPEG-LS	DCT	Run length Coding	Fast, Simple	Complex working , poor compression
3	JPEG 2000	Wavelet base	Huffman	Many feature support, based on tiling	Complex working, slow processing

During the past ten years various compression methods have been developed to solve major problem and challenges handled by DICOM viewers. The compression methods can be classified broadly into reversible (lossless) and irreversible (lossy) compression.

**B. Lossless method**

Lossless compression can completely recover the original data but this reduces the compression ratio to around 2:1. In DICOM viewer, lossless compression has been a need because it facilitates accurate diagnosis due to no degradation on the original image [7].

Table.2 Lossless methods in different domains

S. No.	Domain	Principle Used	Methods
1	Coding	The symbol codes are of variable length.	Arithmetic, Huffman's, LZW, Run Length Coding
2	Special	Variable Block Size	JPEG, JPEG-LS

		Compression	
3	Transform	Exploit special frequency information contained in the image to achieve compression	Multiresolution Transform, Wavelet Transform

**Lossy method**

Generally lossy compression work in three step. Firstly in transform that eliminate the redundancy in inter pixel. Secondly quantize to remove psych visual redundancy and thirdly efficient encoding. Following are the hierarchical tree for classification of lossy compression technique used in DICOM image compression.

Table.3. Different lossy compression methods and scheme

S. No.	Compression Methods	Compression Schemes
1	Quantization	Scalar and Vector
2	Transform Based	KLT, DFT, DCT
3	Block Transform Coding	JPEG
4	Full Frame Transform Coding	Sub band Coding (DWT)

Following factor are consider for selection of compression technique for DICOM image:

- Sensitive to input image type
- Operational bit rate
- Implementation issue
- Encoder/ Decoder Asymmetry
- System capability

**III. IMAGE HIERARCHICAL CODING FOR LOSSLESS COMPRESSION**

In the hierarchical coding the image data are encoded in such a way that it is possible to access a given image at different quality level or resolution. The image hierarchical coding is classify in to two parts; fixed resolution and variable resolution.

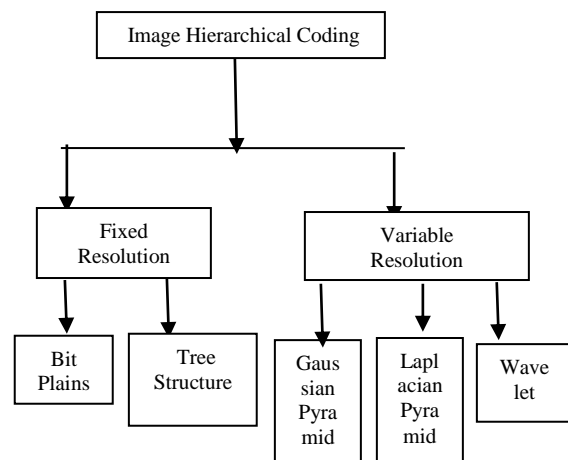


Figure 2. Image Hierarchical coding

C. Fixed Resolution

In the fixed resolution the original image and the value at any particular pixel location is retired as one moves from level to level. Fixed resolution is classify into two parts; Bit plane, Tree Structure.

1) Bit Plane

In the bit plane method; an n bit image can be represented by n bit planes, each of the same dimension as the original image. This method start with most significant bit plane and end with least significant bit plane. The bit plane is a binary image compression technique that can be used to reduce the bit rate [8].Served bit plane method works as follow:

- a) Load the uncompressed gray scale input image size  $M*N$ .
- b) To convert gray scale image in to eight bit plane image. The image can be represented by an 8 bit vector. Bit Planes =  $b7, b6, b5, b4, b3, b2, b1, b0$
- c) Discard the lower plane(0 to 3) and consider only upper plane(4 to 7)
- d) Apply run length coding to bit plane (4 to 6) and lossless predictive coding to bit plane 7.

Following is the example of Bit plane and run length coding.

1101	0111	1000
1100	1011	1001

Figure3. (a) A 3x2 4-bit grayscale image

1	1	0
0	1	1

Figure3. (b) b0 Bit Plane

0	1	0
0	1	0

Figure3. (c) b1 Bit Plane

1	1	0
1	0	0

Figure 3. (d) b2 Bit Plane

1	0	1
1	1	1

Figure 3. (e) b3 Bit Plane

2) Tree Structure

In this method an image is divide into four equal sized sub region. The sub region are described in the preceding paragraph. Each sub region is often represented as a region which is called as quad tree. Each node of a quad tree contains either zero or four children and represents a rectangular region of two dimensional space. Any node having no children is called as a leaf node. Leaf node is completely filled by one color. Any node having four children is called an internal node. Internal node filled with various color. Following are the example of quad tree representation [9].

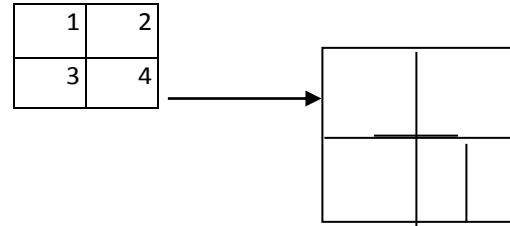


Figure 4. Quad tree representation of an image

B. Variable Resolution

This approach is useful for Pyramid representation. The pyramid representation use full resolution with one level move up. This is probably well suited to multiscale and multiuse environment supporting device and for progressive transmission.

1) Formula for generation of Laplacian Pyramid:

The scheme used to generate Gaussian Pyramid in to two levels; firstly low pass filter is useful to attenuate the high spatial frequency and secondly subsampling the remaining pixels. Thirdly pixel data is converted in to decimated image [10].

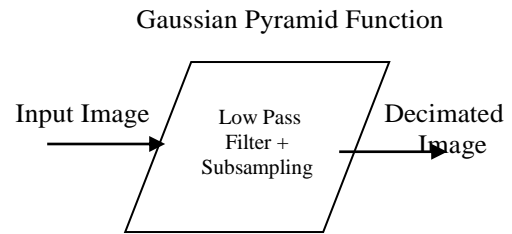


Figure 5. The structure of Gaussian Pyramid

$$L_L = G_L - G'_L, \quad 0 \leq L < H-1 \quad (1)$$

$G_L$  = Input image

$G'_L$  = Gaussian Pyramid Function

$L_L$  = Decimated Image

2) Generation of Gaussian Pyramid Function:

The image is initially represented by one dimension array where  $G_0$  is contains (i, j) columns and rows. By applying level 1 image on  $G_1$  (i, j) and again by applying level 2 image is on  $G_2$  (i, j). Now here we have selected the size of weighting function is until level 2 using 5 by 5 pattern is generated [11].

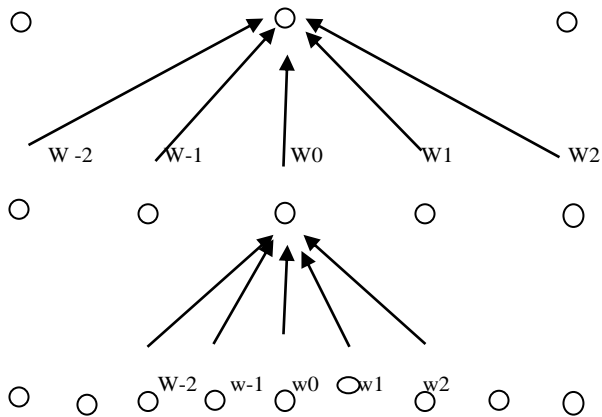


Figure 6. The 5 by 5 pattern generation of Gaussian Pyramid

*Extension of Gaussian Pyramid:*

In the Gaussian Pyramid the sequences of image is expanded by using formula.

$$G'_{L=Expand(G_{l+1})} \quad (4)$$

$$G'_{l(i,j)} = 4 \sum_{m=-2}^2 \sum_{n=-2}^2 W(m,n) \left( \frac{i-m}{2}, \frac{j-n}{2} \right) \quad (5)$$

*C. Wavelets*

The wavelet means varying frequency in limited duration. The wavelet transform had numerous applications in the signal processing. In 1988, Stephane Mallat and Meyer proposed the concept of multiresolution. In the same year, Ingrid Daubechies found a systematical method to construct the compact support orthogonal wavelet. In 1989, Mallat proposed the fast wavelet transform [12]. Wavelet transformations have become some of the best established tools. Two main reasons for their use may be given: firstly, certain signal processing operations are more readily and more efficiently performed in the transform domain (i.e. correlation are linear filtering through the Fourier Transform), and secondly the important information may be compressed into fewer terms [13]

Wavelets has three basic characteristics:

- a) Ability to generate function: We can generate infinite series of wavelet using a single scaling function by scaling and translation operation.
- b) Multiresolution ability: The ability to represent a function at different level, by different weighted sums, which is derived from the original function
- c) Ability to generate low level coefficient from higher level coefficients: This is archive through tree structured filters called filter banks

The basic approach of Wavelet based image compression are as follows:

- To compute the two dimensional wavelet transform
- Alter the transform coefficients
- To compute the inverse transform

There are three methods for DICOM image compression using wavelet.

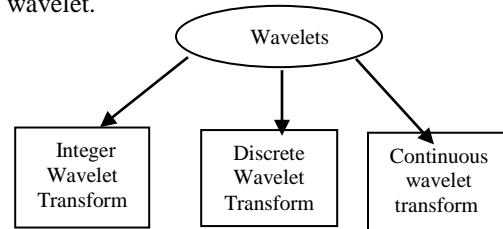


Figure 7. Wavelet Classification

*1) Using Integer Wavelet Transform and Predictive Coding*

The integer wavelet transform method is applied on the image F(n) which divides the image into four subbands ss, sd, ds, dd and . Now predictive coding is applied on the four different bands separately giving outputs D0, D1, D2, and D3. IWT is based on Haar Filters with forward scheme. This technique split input signal in to even and odd signal [14] [15].

$$Split(S_j) = (Odd\ j-1, Even\ j-1) \quad (6)$$

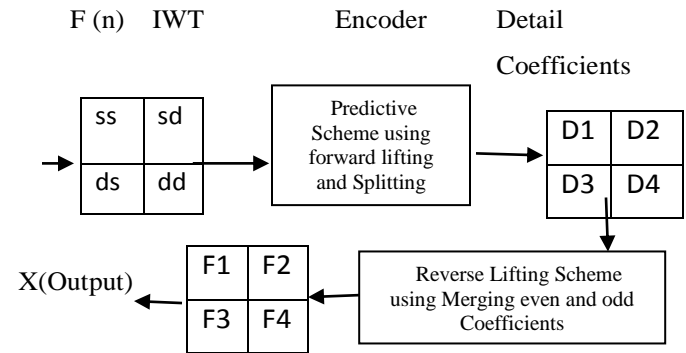


Figure 8. Block Diagram of IWT and Predictive Coding

*2) Using Discrete Wavelet Transform and Subband Coding*

The discrete signal in terms of the wavelet coefficients can be written as

$$S(n) = \frac{1}{\sqrt{M}} \sum_k W\phi(j_0, k)\phi_{j_0, k}(n) + \sum_{j=0}^{\infty} \sum_k W\phi(j, k)\phi_{j, k}(n) \quad (7)$$

Where  $\phi$  is scaling function and  $\varphi$  is work as wavelet function. The two dimensional DWT is implemented

through subband coding. In case of subband coding input image is extracted in to approximate form in both horizontal (n1) and vertical direction (n2). The two-dimensional DWT of an image function S (n1, n2) of image size is represented [16].

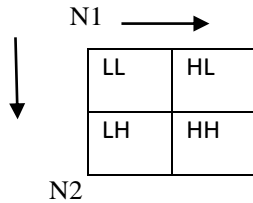


Figure 9. Block Diagram of subband partitions

This analysis of 2-D signals require the use of following two-dimensional four different filter functions through the product, as defined below.

$$\phi(n1, n2) = \phi(n1)\phi(n2) \dots \dots \dots (8)$$

$$\phi H(n1, n2) = \phi(n1)\phi(n2) \dots \dots \dots (9)$$

$$\phi V(n1, n2) = \phi(n1)\phi(n2) \dots \dots \dots (10)$$

$$\phi D(n1, n2) = \phi(n1)\phi(n2) \dots \dots \dots (11)$$

The above equations are represented the approximated signal, signal with horizontal details, signal with vertical details and signals with diagonal details respectively [17]

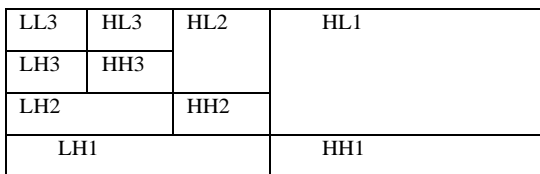


Figure 10. DWT Subband analysis is for level 3

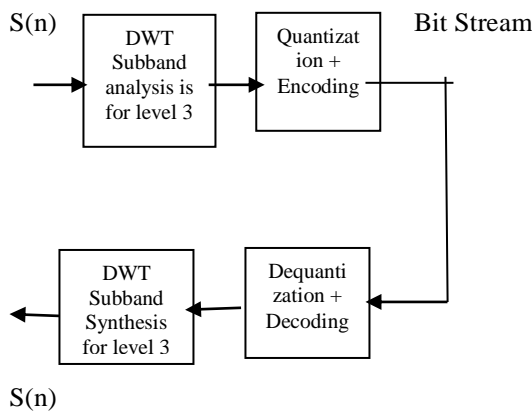


Figure 11. Three Level Image Compression System using DWT

#### IV. COMPARATIVE ANALYSIS

Table 4 Comparison of Transforms

Transform	Basic Properties	Characterizes
Fourier	Sines +Cosines	Not localized in space Localized in Frequency
Gaussian Pyramid	Gaussian Filters	Localized in space Not localized in Frequency
Laplacian Pyramid	Laplacian Filters	Localized in space Not localized in Frequency
Wavelet Pyramid	Wavelet Filters	Localized in space Localized in Frequency

Table.5 Comparison of Wavelets Family

Type	Advantage	Disadvantage	Property Support	Application
Haar	First, Fast and Simple, Memory efficient	Discontinuous and does not approximate continuous signal very well	Orthogonal, Symmetric	Modern Camera with high resolution
Daubechies	Compact, Supported	no explicit expressions and can only be calculated through recursion	orthonormal	solving a broad range of problems, e.g. self-similarity properties of a signal or fractal problems, signal discontinuities, texture feature analysis
Biorthogonal Wavelet	More design freedom for analyzing and synthesis of wavelet	is a very restrictive request, it cannot be fulfilled for the odd number of dilatation equation coefficients, e.g. the linear spline and matched wavelet	symmetry	Study of atmospheric layer turbulence.
Coiflet wavelet	Compactly supported wavelets	There is no any formula for coiflets for arbitrary genus, and there is no formal proof of their existence for arbitrary genus at this time.	highest number of vanishing moments	fingerprint image compression
Symlet	different level of decompositions, so the filter order is going to increase, compression is increasing	visual quality of compressed image is degraded	"least asymmetric	Symlet Wavelet can be used with such functions as discrete wavelet transform and Wavelet Phi, etc

## V. CONCLUSION

Now we conclude, the purpose of this paper to explore available approaches of image compression for DICOM. This papers also outlines various file format include conversion technique and coding scheme with their advantage and disadvantage in which radiologist can store and manage medical images. The literature analyze that lossy compression approach is not feasible for medical image compression, but still radiologist want some advantage like high degree of compression and better perceptual quality compare to lossless compression. Lastly the discussed DWT and subband coding method is an efficient method of compression. But when the level of decomposition is increase pixel resolution is decrease in newly created subband. This paper compare attribute of Wavelet family on the basis of advantage, disadvantage and property support and applications.

## REFERENCES

- [1] Shapiro and Stockman “ Imaging and Image Representation” Computer Vision; March 2000, ISBN-13: 978-0130307965, ISBN-10: 0130307963
- [2] S Jayaraman, S Esakkiraja, T Veerakumar, “ Digital Image Processing” Published by Tata McGraw Hill Education Private Limited , 2009, ISBN: 978-0-07-014479-8 1 Page
- [3] Michele Larobina, Loredana Murino, “Medical Image File Formats” Journal of Digital Imaging, April 2014, Volume 27, Issue 2, pp 200–206
- [4] Dandu Ravi Verma, “ Managing DICOM Images: Tips and tricks for the radiology and imaging”, Journal of Digital Imaging, 2012 , Volume : 22 , Issue : 1, Page : 4-13, doi: 10.4103/0971-3026.95396
- [5] Nitin S. Ujgare, Swati P. Baviskar, “Conversion of DICOM Image in to JPEG, BMP and PNG Image Format” International Journal of Computer Applications (0975 – 8887) Volume 62– No.11, January 2013
- [6] N. Faccioli, S. Perandini, a. Comai, M. D’ Onofrio, R.Ozzimucelli; “ Proper use of common image file format in handling radiological image”, La radiological Medica, April 2009, Volume 114, issue3, PP 484 – 495
- [7] Mrinal Kr. Mandal; “Digital Image Compression Techniques” Chapter Multimedia Signals and Systems, 2003, Volume 716, The Springer International Series in Engineering and Computer Science pp 169-202, 978-1-4615-0265-4
- [8] K. Funahashi, H. Kikuchi, and S. Muramatsu, “Progressive Biplane coding for lossless image compression,” IEICE Tech. Rep., Vol. 108, No. SIP2008-39, pp. 23–28, Jun. 2008.
- [9] Petra Bosilj, S\_ebastien Lef\_evre, Ewa Kijak. Hierarchical Image Representation Simplification Driven by Region Complexity. International Conference on Image Analysis and Processing, Sep 2013, Naples, Italy. PP.562-571, 2013.
- [10] Peter J. Burt, Edward H. Adelson, “The Laplacian Pyramid as a Compact Image Code” IEEE Transactions On Communications, Vol. Com-31, No. 4, APRIL 1983
- [11] Mill Xbt, AMelmid Hachicha,blain Mtrigot, “An Efficient Parallei, Implementation Of The Laplacian Pyramid Algorithm” IAPR Workshop on Machine Vision Application, December 7 -9, 1992, Tokyo
- [12] K Gopi1, Dr. T. Rama Shri, “Medical Image Compression Using Wavelets”, IOSR Journal of VLSI and Signal Processing (IOSR-JVSP) Volume 2, Issue 4 (May. – Jun. 2013), PP 01-06 e-ISSN: 2319 – 4200, p-ISSN No. : 2319 – 4197
- [13] Paul Sajdaa,\*, Andrew Lainea and Yehoshua Zeevib, “Multi-resolution and wavelet representations for identifying signatures of disease”, ISSN 0278-0240/02, 2002 – IOS Press.
- [14] T.G. Shisat and V.K. Bairagi, ” Lossless Medical Compression by Integer Wavelets and Predictive Coding”, International Scholarly Research Notices Biomedical Engineering, Volume 2013, Article ID 83257, http://dx.doi.org/10.1155
- [15] D. Neela, Lossless Medical Image Compression Using Integer Transforms and Predictive Coding Technique, Department of Electrical and Computer Engineering, Jawaharlal Nehru Technological University, Jawaharlal Nehru, India, 2010.
- [16] Bouden Toufik and Nibouche Mokhtar ,“The Wavelet Transform for Image Processing Applications”, Chapter from the book Advances in Wavelet Theory and Their Applications in Engineering, Physics and Technology
- [17] Suma, V Sridhar, “A Review of the Effective Techniques of Compression in Medical Image Processing”, International Journal of Computer Applications (0975 – 8887) Volume 97– No.6, July 2014

## Authors Profile

*Trupti Baraskar* obtained his Engineering Graduate Degree in Electronics and Telecommunication Engineering from Oriental Institute of Science and Technology, Bhopal (MP) India in 2000, Post Graduate Degree in Communication Controls and Networking from Madhav Institute of Science and Technology, Gwalior (India) in 2004.

He has been in the field of teaching since last 13 years and is presently, working as an Assistant Professor in Department of Information Technology, Maharashtra Institute of Technology, Pune India. He is also working as a research scholar in S.G.B.Amravati University and is working on development of “Development of Data Integrating and Compression Techniques in DICOM Images”

*Prof. Dr. Vijay R. Mankar* received his B.E. degree in Electronics and Power Engineering from Government College of Engineering, Amravati (India) in 1986, M.Tech. in Electronics Engineering from erstwhile Visvesvaraya Regional College of Engineering, Nagpur (India) in 1990 and Ph.D. from S.G.B. Amravati University, Amravati (India) in 2009.

He has been in the field of teaching since last 25 years and is presently, working as a Deputy Secretary, MSBTE, Pune Region. He has served as Head of Department and the Professor, with Department of Electronics Engineering, Govt. Polytechnic, Amravati.